





Page 1 of 8

Test Number:	NOAL 20-0227
Test Method:	ASTM E90-09 (2016): Laboratory Measurement of Airborne Sound Transmission of Building Partitions and Elements
Result Summary:	STC 28
Test Date:	February 13, 2020
Specimen:	Wall Assembly
Test Site:	North Orbit Acoustic Laboratory Facility 512 5th Street NW Dyersville, IA 52040
Report Date:	February 26, 2020
Prepared For	Everblock Systems, LLC 790 Madison Avenue, Suite 506, New York, NY 10065
Technician:	E. Dick
Prepared by:	E. Dick North Orbit Acoustic Laboratories P.O. Box 6948 Minneapolis, MN 55406

ELECTRO ALLY **A**AP ROD δFΓ RE

David M Berg Laboratory Manager

FIFCT NICALLY

Heide Gross Laboratory Quality Manager



Prepared For: Everblock Systems, LLC

790 Madison Avenue, Suite 506, New York, NY 10065



ASTM


**Test Report** 

Test Number: NOAL 20-0227

Page 2 of 8

E90



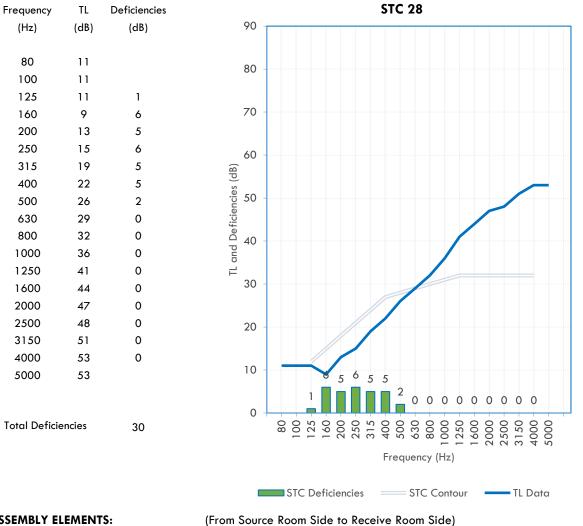

#### **ASSEMBLY ELEMENTS:** Sheathing

48" x 96" x 3" EverPanel Modular Wall Panels

See Appendix C on pages 6 and 7 for a full description of Assembly Elements



Prepared For:Everblock Systems, LLC790 Madison Avenue, Suite 506, New York, NY 10065Test Date:February 13, 2020Report Date:February 26, 2020

ASTM

**Test Report** 

Test Number: NOAL 20-0227

Page 3 of 8

E9(

#### SPECIMEN DESCRIPTION

The specimen is a wall assembly and it's elements are described below with results on page 2. Detailed information regarding the specimen is found in Appendix C on pages 6 and 7.

#### INSTALLATION AND DISPOSITION

The wall assembly was originally constructed on February 13, 2020 at the Dyersville acoustic laboratory location.

Qualfied representatives from North Orbit Acoustic Laboratories observed the installation process and inspected all major building elements when completed and prior to testing.

#### FILLER WALL

A high transmission loss double stud filler wall was constructed in the entire  $20' \times 12'$  test opening. The filler wall consisted of two  $1.5'' \times 7.5'' \times 12'$  wood bottom and top plates separated by approixmately 3" of air space.  $1.5'' \times 3.5''$  wood studs were placed at 24" OC in each frame. The resulting cavity was filled entirely with fiberglass batt insulation. Four layers of Type C gypsum wall board (GWB) were attached to the outside of the frames on both sides. The GWB on the north side of the filler is mounted on reslient clips and 7/8'' hat channel at 16" OC. The GWB on the south side is directly attached to the frame. The filler wall assembly was tested and the results retained for use in composite wall corrections. The filler wall was then modified to provide a  $12' \times 8'$  decoupled opening to accomodate tests in this series.

#### **TEST METHODS**

Methods follow the published standards listed below. All values derived from single-direction transmission loss measurements.

ASTM E90-09 (2016): Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

ASTM E413-16: Classification for Rating Sound Insulation

All results reported herein were derived from tests performed in full accordance with test method ASTM E90-09 (2016). The laboratory and measurement systems fully meet all requirements of the test standard and the requirements of ASTM E90-09 (2016) Annex A2: Qualification of room sound fields and microphone systems used for sampling.

North Orbit Acoustic Laboratory (NOAL) is accredited through A2LA certificate number 4240.01 for this test procedure. This test report relates only to the item(s) tested. This report shall not be used to claim product certification, approval, or endorsement by North Orbit Acoustic Laboratories or A2LA.

#### CONFIDENTIALITY

The client has full control over this information and any release of information will be only to the client. The specific testing results are deemed to be confidential exclusively for the client's use. Reproduction of this report, except in full, is prohibited.



Prepared For: Everblock Systems, LLC 790 Madison Avenue, Suite 506, New York, NY 10065 Test Date: February 13, 2020 Report Date: February 26, 2020

#### **APPENDIX A: MEASUREMENT SETUP**

#### **ENVIRONMENT**

Temperature:	67.2 °F [19.6 °C]
Relative Humidity:	53.0%
SPECIMEN AREA	
SPECIMEN AREA	
Specimen Area:	96.0 ft <sup>2</sup> [8.9 m <sup>2</sup> ]

Specimen Area:

#### **CHAMBER VOLUME - AIRBORNE TRANSMISSION**

Source Room	7,075.0 ft³ [200.3 m³]
Receiver Room	7,852.8 ft <sup>3</sup> [222.4 m <sup>3</sup> ]

#### INSTRUMENTATION

Description	Brand	Model	Serial
Analyzer	Sinus	Apollo	7510
Software	Sinus	Samurai	ver. 2.8.3
Microphone	Brüel & Kjær	4166	1620281
Microphone	Brüel & Kjær	4166	1620312
Preamplifier	Brüel & Kjær	2669	2025373
Preamplifier	Brüel & Kjær	2669	2083679
Rotating Boom	Brüel & Kjær	3923	2736620
Rotating Boom	Brüel & Kjær	3923	2705113
Calibrator	Brüel & Kjær	4231	2416109
Loudspeaker	Mackie	SR1521z	PP14915
Loudspeaker	Mackie	SR1521z	PP14940
Thermohygrometer	Digi-Sense	20250-21	192657769





Test Number: NOAL 20-0227

Page 4 of 8



Prepared For:	Everblock Systems, LLC
	790 Madison Avenue, Suite 506, New York, NY 10065
Test Date:	February 13, 2020
Report Date:	February 26, 2020



ASTM

Test Report

Test Number: NOAL 20-0227

Page 5 of 8

E90

#### APPENDIX B: CALCULATION RESULTS

Freq. Band	Spec TL	Data Flags	95% C.I.	Flanking Limit	STC Deficiencies
(Hz)	(dB)	(see below)	(dB)	(dB)	(dB)
25					
32					
40					
50	7.0		±4.91	40	
63	9.8		±3.77	45	
80	11.4		±4.44	46	
100	11.1		±2.64	49	
125	11.0		±2.32	55	1
160	9.3		±1.61	58	6
200	12.5		±1.00	62	5
250	14.8		±0.92	65	6
315	18.8		±0.80	68	5
400	22.4		±0.66	71	5
500	25.7		±0.61	74	2
630	29.1		±0.63	76	0
800	31.9		±0.69	79	0
1000	35.8		±0.35	81	0
1250	40.9		±0.54	84	0
1600	44.3		±0.37	83	0
2000	47.2		±0.41	82	0
2500	48.4		±0.38	86	0
3150	51.1		±0.48	90	0
4000	53.3		±0.37	89	0
5000	53.4		±0.81	86	
6300					
8000					
10000					
	below STC contou	ur (dB)			30
STC contour [AST	M E413]				28

Note: 95% confidence intervals for TL measurements from room qualification data. ASTM E1289 reference sample and repeatability data available upon request. The standard deviation of reproducibility is stated in ASTM E90 as <2 dB for frequencies from 125 Hz to 4 kHz. Flanking Limit derived from chamber flanking study. Extended frequency results below 80Hz and above 5000Hz are for reference only.



Prepared For:	Everblock Systems, LLC
	790 Madison Avenue, Suite 506, New York, NY 10065
Test Date:	February 13, 2020
Report Date:	February 26, 2020





Test Number: NOAL 20-0227

Page 6 of 8

#### APPENDIX C: SPECIMEN ASSEMBLY DESCRIPTION

Overall Mass 194.6 lb [88.3 kg]

Surface Weight 2.0 PSF [9.9 kg/m<sup>2</sup>]

Puilding Flowert	Mass	Surface Weight
Building Element	lb [kg]	PSF [kg/m²]
48" x 96" x 3" EverPanel Modular Wall Panels	194.6 [88.3]	2.03 [9.90]

All materials were weighed prior to installation. Weights of fasteners, tape and sealant are not represented in the above totals.



Prepared For:Everblock Systems, LLC790 Madison Avenue, Suite 506, New York, NY 10065Test Date:February 13, 2020Report Date:February 26, 2020

# APPENDIX C: SPECIMEN ASSEMBLY DESCRIPTION (CONTINUED)

EverPanel Modular Wall Panels were supplied by the Client. All other materials were purchased through regional retail or wholesale channels.

EverPanel Modular Wall Panels arrived pre-assembled. Each panel consisted of a 4'-0" wide by 8'-0" tall by 3" thick assembly of fiberglass panels on each side, supported around the perimeter with rigid plastic framing elements. In addidion, wood blocks were position between the fiberglass panels at two places and adhered to both panels.

Three wall panels were installed vertically in the 12'-0" wide by 8'-0" tall specimen opening. Seams were sealed on the source and receiving room sides with 2" wide polypropylene tape. In addition, the perimeter of both sides of the specimen was sealed with 2" wide polypropylene tape, and then 7/8" dense putty tape.



ASTM

**Test Report** 

Test Number: NOAL 20-0227

Page 7 of 8

E90



Prepared For:	Everblock Systems, LLC
	790 Madison Avenue, Suite 506, New York, NY 10065
Test Date:	February 13, 2020
Report Date:	February 26, 2020



ASTM

Test Report

Test Number: NOAL 20-0227

Page 8 of 8

E90

### APPENDIX D: SINGLE-NUMBER CALCULATION TO ISO 717-1

Freq.	Ri	Adj. Ref.	Unfav.	Lii	Li1 - Ri	L <sub>i2</sub>	Li2 - Ri
Band	$(R_i \equiv TL)$	Curve	Deviat.	Spectrum	Level	Spectrum	Level
(Hz)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)
50	7.0						
63	9.8						
80	11.4						
100	11.1	9	0.0	-29.0	-41.1	-20.0	-31.1
125	11.0	12	1.0	-26.0	-38.0	-20.0	-31.0
160	9.3	15	5.7	-23.0	-33.3	-18.0	-27.3
200	12.5	18	5.5	-21.0	-34.5	-18.0	-30.5
250	14.8	21	6.2	-19.0	-34.8	-15.0	-29.8
315	18.8	24	5.2	-17.0	-36.8	-14.0	-32.8
400	22.4	27	4.6	-15.0	-38.4	-13.0	-35.4
500	25.7	28	2.3	-13.0	-39.7	-12.0	-37.7
630	29.1	29	0.0	-12.0	-42.1	-11.0	-40.1
800	31.9	30	0.0	-11.0	-43.9	-9.0	-40.9
1000	35.8	31	0.0	-10.0	-46.8	-8.0	-43.8
1250	40.9	32	0.0	-9.0	-50.9	-9.0	-49.9
1600	44.3	32	0.0	-9.0	-54.3	-10.0	-54.3
2000	47.2	32	0.0	-9.0	-57.2	-11.0	-58.2
2500	48.4	32	0.0	-9.0	-58.4	-13.0	-61.4
3150	51.1	32	0.0	-9.0	-61.1	-15.0	-66.1
4000	53.3						
5000	53.4						
		Sum =	30.5	R <sub>A,1</sub> =	26.0	R <sub>A,2</sub> =	21.8
		$R_w =$	28	C =	-2	C <sub>tr</sub> =	-6

 $R_w (C; C_{tr}) = 28 (-2; -6)$   $R_w (C; C_{tr}, C_{50-3150}; C_{tr,50-3150}) = 28 (-2; -6; -2; -7)$   $R_w (C; C_{tr}; C_{100-5000}; C_{tr,100-5000}) = 28 (-2; -6; -1; -6)$   $R_w (C; C_{tr}; C_{50-5000}; C_{tr,50-5000}) = 28 (-2; -6; -1; -7)$ 

Calculations according to the standard ISO 717-1 are based on an assumed equivalency of the ASTM and the corresponding ISO test methods. NOAL's scope of accreditation includes ASTM E90 and the test herein is performed according to this standard as described, but NOAL does not hold accreditation for the corresponding ISO standards.

The spectrum adaptation terms C and Ctr characterize performance against two specific sound sources, A-weighted pink noise and A-weighted traffic noise respectively. The standard ISO 717-1 includes a discussion of "Use of Spectrum Adaptation Terms" in Annex A (informative).

Each spectrum adaptation term may additionally be reported with extended frequency bands included. The calculation above represents the primary frequency range. The results below the table show the calculated primary ratings as well all available extended-frequency ratings, so that this specimen may be compared against corresponding ratings of other specimens.